



GAS DATA

LISTEN · ANALYSE · INFORM


Dystrybutor w Polsce: Atut Sp. z o. o. tel. +48 817403345 info@atut.lublin.pl www.atut.lublin.pl

GFM 436

Portable Gas Analyser



The GFM 436 portable gas analyser makes all work steps as easy as possible for you. It is a fixed configuration, measuring the proportions of gases presented in greenfield and brownfield sites, as well as land affected by landfill operations or other contamination. Operation is extremely simple, yet the readings obtained are comprehensive and accurate.

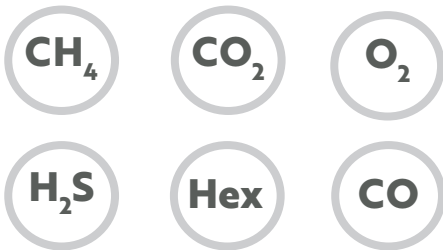

- 6 gas analysis channels
- Measure Atmospheric, Static and Differential pressures
- Simple reporting - via SiteMan PC software
- Small portable design - easy to hold in one hand
- 12-month service interval

Applications

Site Investigation

Compliance Monitoring

Borehole Monitoring

Landfill gas control

Key Benefits

Suitable Solutions

Gas Data equipment has a wide range of internal gas sensors and external attachments, giving you the choice and freedom to purchase your monitoring solution tailored to your operations.

Real-Time Data

The GFM series supports site operations in the best possible way. Quickly and easily, it captures information in just a few minutes, giving you visibility of the production and quality of the gases.


Cost-effective

Versatile, lightweight and easy to use. The GFM range doesn't require any specialist knowledge, delivering valuable data at your fingertips. A 4-hour charge from flat provides 8 hours of continuous use.

GFM 436

Portable Gas Analyser

Technical Specifications

General	
Rating	ATEX, IECEx, UKEx  II 2 G Ex ib IIB T1 Gb
Dimensions	230mmx100mmx65mm
Weight	1kg
Ambient Temperature Range	-10°C to 40°C
Protection Rating	IP65
Aspiration Rating	500ml/min

Gas Measurements				
Channel	Sensor Type	Range	Resolution	Accuracy
CH4	IR	0-100%	0.1%	± 3.0%
CO2		0-100%	0.1%	± 3.0%
O2	EC	0-25%	0.1%	± 0.1%
H2S		0-5000ppm	1ppm	± 50%
CO		0-2000ppm	10ppm	± 100ppm
Hexane	Calculation	0-2%	0.1%	± 0.2%
LEL		0-100%	0.1%	± 3.0%

Pressure Measurements				
Atmospheric	Transducer	800 -1200mbar	1mbar	± 2mbar
Static		± 200mbar	1mbar	± 0.5mbar
Differential	Calculation	± 1250Pa	1Pa	± 3 - ± 250Pa
Flow Rate	Transducer	-60-100Lhr ⁻¹	0.1Lhr ⁻¹	± 3Lhr ⁻¹

Optional Measurements				
Velocity	Vane Anemometer	0.7-40ms ⁻¹	0.1ms ⁻¹	± 0.5ms ⁻¹
Temperature	Thermistor	-10-100°C	0.5°C	± 1.0 °C

All GFM's are available to hire or purchase. Please contact our team for details.

GFM 436 Specific Features

- Factory calibrated infrared sensor for measuring Hexane vapour
- Photo Ionisation Detector (PID) correction factor for low levels of Volatile Organic Compound (VOC)
- Bi-directional measurement of instantaneous and peak borehole flow
- Storage of 2 water level readings from dipmeter taken at each borehole
- Manual data storage and programmable unattended data logging functions
- 3 tier hierarchical 24 character alphanumeric labels for the naming of stored reading sets

Certifications



Advantages of our Annual Servicing & Calibration offering are:

- Complete service of your instrument including, replacing any faulty parts or parts nearing the end of their life
- Recalibration of the instrument
- Highly experienced servicing team, equipped to service, calibrate and repair your instruments worldwide
- Excellent customer service and response time
- 12-month warranty covering any parts required
This is intended to cover internal component failures. Faults caused by negligence, accident, physical damage, missing parts e.g. (gas filters and batteries), will not be repaired free of charge, but cost estimates will be supplied for approval before any work is done
- Gas Data arranged collection and delivery of your instrument (the UK addresses only)


Dystrybutor w Polsce:
Atut Sp. z o.o.
ul. B. Prusa 8, 20-064 Lublin
tel./fax: 081 740 33 45
e-mail: info@atut.lublin.pl
www.atut.lublin.pl



 +44 (0)24 7630 3311  office@gasdata.co.uk  www.gasdata.co.uk



The GFM 426 combines the functions of three instruments in one portable gas analyser. Making all work steps as easy as possible for you. Measuring gas channels, pressure and flow with a built-in data logger for landfill gas extraction. Operation is extremely simple, yet the readings obtained are comprehensive and accurate.

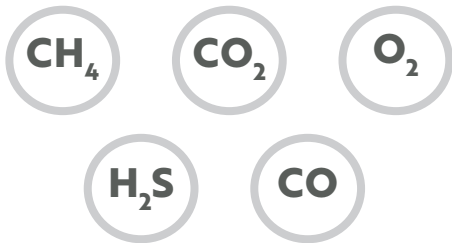

- 5 gas analysis channels
- Measure Atmospheric, Static and Differential pressures
- Simple reporting - via SiteMan PC software
- Small portable design - easy to hold in one hand
- 12-month service interval

Applications

Landfill Gas Extraction

Waste to Energy

Landfill Gas Perimeter Monitoring

Key Benefits

Suitable Solutions

Gas Data equipment has a wide range of internal gas sensors and external attachments, giving you the choice and freedom to purchase your monitoring solution tailored to your operations.

Real-Time Data

The GFM series supports site operations in the best possible way. Quickly and easily, it captures information in just a few minutes, giving you visibility of the production and quality of the gases.

Cost-effective

Versatile, lightweight and easy to use. The GFM range doesn't require any specialist knowledge, delivering valuable data at your fingertips. A 4-hour charge from flat provides 8 hours of continuous use.